

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
 - TEXT CUT OFF AT TOP, BOTTOM OR SIDES
 - FADED TEXT
 - ILLEGIBLE TEXT
 - SKEWED/SLANTED IMAGES
 - COLORED PHOTOS
 - BLACK OR VERY BLACK AND WHITE DARK PHOTOS
-
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶ :

E04B 1/84

A1

(11) International Publication Number:

WO 97/27370

(43) International Publication Date:

31 July 1997 (31.07.97)

(21) International Application Number: PCT/SE97/00110

(22) International Filing Date: 23 January 1997 (23.01.97)

(30) Priority Data:

9600273-8

25 January 1996 (25.01.96)

SE

(71) Applicant (for all designated States except US): SONTECH AB
[SE/SE]; P.O. Box 5095, S-165 11 Håsselby (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): KNIPSTEIN, Dale
[CA/CA]; 108 Russel Street N., Madoc, Ontario K0K 2K0
(CA).(74) Agents: STENROOS, Barbro et al.; H. Albiñs Patentbyrå AB,
P.O. Box 3137, S-103 62 Stockholm (SE).(81) Designated States: AU, BR, CA, CN, JP, KR, MX, RU, US,
European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB,
GR, IE, IT, LU, MC, NL, PT, SE).


Published

With international search report.

(54) Title: SOUNDABSORBING ELEMENT AND PROCEDURE FOR MANUFACTURE OF THIS ELEMENT AND USE OF THIS
ELEMENT

(57) Abstract

The invention relates to a soundabsorbing element including a sheet of material with holes in it and a process for manufacturing the same, in which the material sheet is self-supporting and the holes are microslits (1) arranged at predetermined distances from each other in the length and width of the sheet, in which at least part of the sheet close to each slit has been partly pressed out of the plane of the material. The manufacturing process according to the invention includes that a sheet of material is worked by a shearing tool, which is designed to create microslits by applying a sufficiently high pressure at predetermined locations on the sheet at which the material sheet partly breaks and at least part of the sheet close to each microslit is pressed out of the plane of the material.

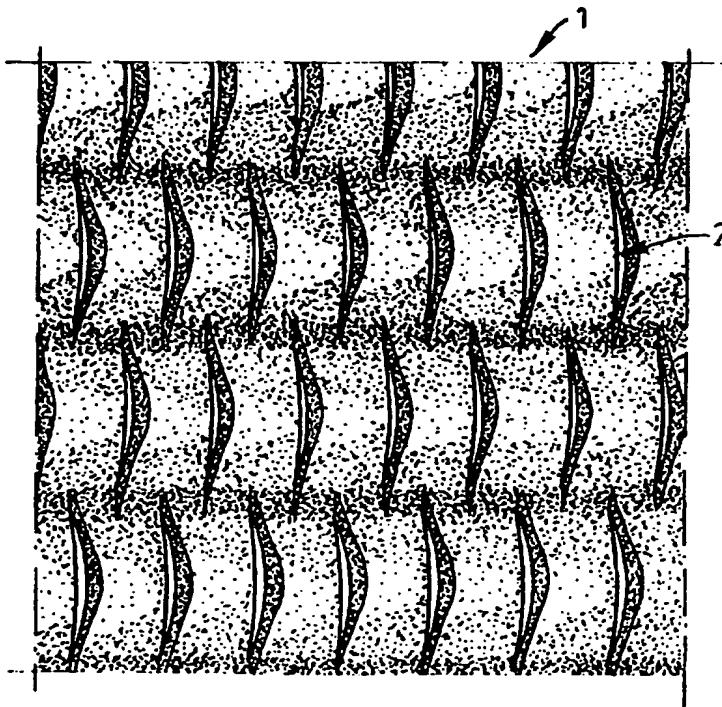

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

Soundabsorbing element and procedure for manufacture of
this element and use of this element

This invention relates to a soundabsorbing element, how to manufacture it and how to use it.

5

Different kinds of soundabsorbing elements are known in the technical field.

Damping materials that are mounted in the ceiling often consist of a perforated plate with a soundabsorbing material in the form of absorbing felt or some other fiberbased material, placed on the backside of the plate. These plates are placed at a
10 certain distance from the actual ceiling. This, and the fact that the soundabsorbing material itself requires space means that the available height in the room is reduced. Other types of acoustical tiles made of fibres, glassfibers or asbestos have disadvantages mainly during installation but, also during removal as handling them is health-hazardous. Foamed plastics are also used as absorbing elements. These
15 materials have the obvious drawback that they are flammable. Plastic foams often have a short life following which they fall apart.

In the Swedish patent 207 484 a soundabsorbing element for ceilings, walls or similar applications is described. The element according to the patent consists of a
20 single plate or a long coil of material, that is given a great many openings arranged in parallel rows where the parts of the element lying between adjacent and parallel slits are pressed out of the plane of the plate, and said parts connected to the element by flaps. All the protruding parts are hereby situated in a plane parallel to but outside the plane of the plate. The openings are thus constituted by a similarly
25 sized slits oriented perpendicular to the plane of the material. Each slit is thus adjacent to the plate and to the protrusion connected by flaps to the plate. These protrusions are oriented essentially parallel to the plate. If the upper surface of the pressed out protrusions still would be below the plates lower surface, the patent claims that no slits have been created, i.e. a solely vertically oriented slit through the
30 plate is not considered included in the patent claims but the protrusion must be

created in a way so that the protrusion essentially is pressed out beyond the surface of the plate.

A similar construction is known from the Swedish laid open publication 394 126 where a metal sheet is described which has a great number of protruding segments shaped like parallel ribs, each of the protruding segments consisting of a part of the metal plate that lies between two longitudinally oriented slits and where the cut surfaces of each protruding the segment are pushed out beyond the central plane of the plate.

Combinations of plates with penetrating slits of varying shapes in combination with a layer of soundabsorbing additional material are also known for instance from the Swedish laid open publication 325 694 and US 2,009,512.

In addition to above mentioned plates there are various absorbent panels of pressed fibers and porous materials, in combination with plates, or separate.

A common feature in the known art is that the sound penetrates the plate through holes and slits of rather large size and that the plate itself works as a resonant absorber. In order to increase the energy losses further i.e. to increase the soundabsorption, an airflow resistance layer is placed behind the holes or slits.

These earlier types of perforated acoustic tiles are of the Helmholtz resonator type, i.e. a resonant absorber where a plate equipped with holes is arranged at a certain distance from a rigid wall.

In an article by H.V. Fuchs, Einsatz mikroperforierter Platten als schallabsorber mit inhärenter Dämpfung, Acustica vol. 81 (1995), p. 107-116 the theory of another type of sound absorbers is described.

In the article it is described how a microperforated plate can be used to achieve a broadband absorption. The theory behind this is that the vibrations in the air (= the sound) is effectively damped by the influence of the shearforces inside the small holes and that in this way a broadband absorption is achieved without using
5 additional fibres or other porous materials. The holes in the article are produced by using a laser beam.

In the above cited article it is concluded, however, that the cost for producing these plates is considerable and when using stiff and or thick materials cost considerations
10 make their use impossible. The theory of microholes has been discussed since 1950 but the difficulties of making so many and so small perforations has prevented the practical use of micro-holes as a sound absorbing means.

Thus it has been shown that sounddamping elements according to the state of the
15 art, for instance Helmholtz type resonators, beside the first mentioned drawbacks, also have the disadvantage that a combination of materials must be used in order to achieve a desirable absorption over a wide frequency range.

I has also been shown that sounddamping elements using microperforations are very
20 expensive to manufacture by for instance using a laser beam as in the above mentioned article.

The main object with this invention is to achieve a soundabsorbing element, having broadband absorption characteristics, that consists of a single plate that is easy to
25 install and easy to manufacture, and requires no additional layer of fiber or the like.

Another object is to achieve a soundabsorbing element that easily can be formed in two or three dimensions, that is weldable and that is easily cleaned even with high pressure spray objects or other cleaning techniques including different kinds of
30 detergents.

Another object is to achieve a soundabsorbing element that is economically advantageous because of the way it is manufactured.

Another object is to achieve a soundabsorbing element which is fire-resistant and
5 can withstand hard conditions e.g. corrosive environments.

Yet another purpose is to achieve a soundabsorbing element that has a decorative effect.

10 It has now been surprisingly shown that with a soundabsorbing element according to the invention, and a way to produce this soundabsorbing element it is possible to achieve excellent sound absorption over essentially the whole of the actual band width. The above shown purposes are achieved by an element and a way of
producing it which are characterised by the characterising parts of claims 1 and 8.

15

With the element and the process a simple and uncomplicated element is achieved that is easy to produce and mount and that withstands high temperatures, that withstands demanding chemical environments and that is self-supporting.

20 The element according to the invention is formable and can be welded and is thin, lightweight, and flexible to mount.

The element according to the invention is moreover adjustable to different acoustic requirements by varying number of slits per m^2 and also by varying the slit shape.

25 Moreover it is possible to foresee the performance which means that an element or element system can be tailored to different needs.

The element has also shown to be very effective at damping machine noise. It can thus be used in engine compartments, in machine tools and vehicles. When used in
30 soundmufflers, part or the whole muffler, can be made of the element according to the invention.

The suitability of the element for the above mentioned applications does not only depend on the excellent formability and the possibility to join the element to metal constructions by well-known techniques as for instance welding, but also on
5 properties such as fire resistance and washability.

Additional features of the element and the process according to the invention are claimed in the dependent claims.

10 The invention is described below with reference to the enclosed drawings in which:

Fig. 1 shows a plan view of one embodiment of a part of an element according to the invention

Fig. 2 shows a magnified partial surface of the element of fig. 1 corresponding to an
15 area of ca 4 cm²

Fig. 3 shows a profile corresponding to the marked line in fig. 2 through a number of slits where they are at their widest

Fig. 4 shows two comparative curves of the variation of absorptionfactor, with frequency for two embodiments of the element according to the invention.
20

In fig. 1 is shown a plane view of a part of an embodiment according to the invention of a soundabsorbing element 1 with microslits 2. The pattern formed by the slits constitutes only one example of many possible placements of the slits. The mutual relationship between the slits is, among others, dependent on how large a
25 part of the surface the slits form. The pattern can of course be created with the purpose of achieving a special decorative effect without taking away the possibility of varying the shape of the slits and their number so that the desired soundabsorption is achieved. The slits on the element shown in fig. 1 are located in rows, and these row are mutually displaced. Through this pattern the elements'
30 stiffness is enhanced since it becomes slightly corrugated, meaning of course that the thinner material can be used than without the corrugation.

Fig. 2 is a magnification of fig. 1 where the slits can be seen in more detail. The maximum width b and length l of the microslits have been marked in the figure. The microslits in the shown embodiment have been accomplished machining the coil of material with a cutting tool with one edge that has a wavy shape against another edge. With a suitable pressure at the material plane the slits 2 are created, with a first and second slit edge, 3 resp. 4, where the protruding teeth on the edge of the tool are pressed against the material plane, which at a certain shear force at one edge 3 of the slit will be partly pressed out of the plane and the slit 2 created. The part 5 shows the slit edge 3 slightly deformed by the operation. The other slit edge 4 cannot be seen in the figure. This machining of the material may be performed by several types of cutting arrangements.

In this cutting operation it is of course assumed that the pressure is controlled so that the length and size of the slits is that intended and that the material is not cut off. To determine the right parameters for the cutting operation can be done by a skilled man within the frame of the invention. By displacing the toothed tool edge in the example shown, in each consecutive row by half of the wavelength between the teeth, the slits will have a zigzag pattern in the longitudinal direction.

20

Fig. 3 show schematically a section along the line III-III in fig. 2. In the figure it can be seen that the microslits 2 are oriented perpendicular to the material plane 1. The partial deformation of the metal caused by the shearing operation has been disregarded in this figure. In the shearing operation to make the slit 2 the shear surface 6 is pressed out more than the thickness of the material plane. Subsequently, the protrusions are rolled so that they stay in a desired position, more or less protruding out of the material plane.

By studying the figures, especially fig. 2, the shape of the microslits can be determined. The slits have an elongated shape narrower at the ends and lying essentially in the plane of the element. Because of the varying width of the slits a

wide frequency range will be absorbed, i.e. soundwaves with different wavelength will be obstructed by different slitwidths.

- A suitable length for the slits lies between 3 and 20 mm. Good results are achieved with lengths of 4-10 mm and with lengths of about 5-6 mm good results are achieved. The maximum width of the slits in the plane of the element can vary between 0,01-0,8 mm, preferably between 0,05 and 0,5 mm with a most preferred width of 0,1 to 0,4 mm.
- 10 Two curves showing the soundabsorption from two different embodiments of the invention are shown in fig. 4 The solid line A show an absorption curve where the element has been mounted according to ISO 356 at distance of 150 mm from the wall. Curve B shows the absorption when two identical elements been mounted on top of each other, one of distance of 100 mm and the other at 150 mm form the
- 15 wall. All of the elements used in the measurements were identically designed, i.e. the same sign and number of slits on all the elements used. From the diagram it can be concluded that by mounting two single elements on top of each other, a better absorption is achieved over essentially the whole frequency range compared to using one single element. Similar curves measured on differently designed elements
- 20 (different slit size and density) will give somewhat different curves, although the general results of multiple elements will essentially be as the shown example.

The materials from which the elements are manufactured are preferably metals. Examples of the like are stainless steel, aluminium and aluminium alloys. Of course

25 other metals or alloys can also be used. It is conceivable that in certain applications suitable plastic materials can be used.

The element according to the invention can of course be manufactured as ready-to-install different sized modules as well as in the form of rolls or sheets that later will

30 be cut to fit for the desired purpose. The element may also, independent of the slits be formed in such a way as to stiffen the element, e.g. by folding etc. The ready

made modules can, as is obvious to the skilled man, be provided with frames, fasteners etc. Other modifications can be made by the skilled man without circumvent the inventive concept as expressed in the following patent claims.

Claims

1. A soundabsorbing element consisting of a sheet of material with holes arranged in it characterised in that the sheet of materials is self-supporting, that the holes are
5 formed of microslits (1) that are distributed spaced from each other in the width and length of the sheet, wherein at least part of the sheet close to each slit partly has been partly pressed out of the plane of the sheet.
2. Soundabsorbing element according to claim 1, characterised in that the partly
10 pressed out parts by means of a light rolling of the sheet of material are partly brought back into the plane of the sheet.
3. Soundabsorbing element according to any of the previous claims, characterised in that the microslits have a maximum width of approximately 0,01 to 0,8 mm,
15 preferably 0,05-0,5 mm, and most preferably 0,1-0,4 mm.
4. Soundabsorbing element according to any of the previous claims, characterised in that the lengths of the microslits are 3-20 mm, preferably 4-10, and most preferably 5-6 mm.
20
5. Soundabsorbing element according to any of the previous claims, characterised in that the material sheet has a degree of perforation of 10-40%, preferably 15-30%, and most preferably 20-30%.
- 25 6. Soundabsorbing element according to any of the previous claims, characterised in that the material sheet has a thickness of 0,1 -10 mm, preferably 0,1-5 mm.
7. Soundabsorbing element according to any of the previous claims, characterised in that the material sheet is made of metal, preferably selected from the group of
30 stainless steel, aluminium or an aluminium alloy.

8. Soundabsorbing element according to any of claims 1-6 characterised in that the material sheet is made from plastic material.

5 9. Soundabsorbing element system characterised in that at least two single elements according to any of claims 1-7 are joined to form a unit, or that at least two of said elements are arranged parallel with a predetermined spacing between them.

10 10. Procedure for manufacture a soundabsorbing element according to any of claim 1-7 characterised in that a material sheet (1) is processed by a shearing tool, which is made so that it can at predetermined distances along the sheets length and width press against the sheet so that holes in the form of microslits (2) are created, in which the sheet being processed partly cracks and at least part of the sheet close to the slit totally or partly is pressed out of the material plane.

15

11. Procedure according to claim 9 characterised in that the protruding parts of the material sheet by a gentle rolling process totally or partly are brought back into the plane of the sheet.

20 12. Use of a soundabsorbing element according to any of claims 1-7 or 8 as a soundabsorbing element in the building and ventilation and heating industry.

13. Use of a soundabsorbing element according to any of claims 1-7 or 8 for the abatement of noise on workshop machines and vehicles.

25

14. Use of a soundabsorbing element according to any of the previous claims 1-8 as soundinsulation in engine compartments.

15. Use of soundabsorbing element according to any of the previous claims 1-7 or 8
30 in mufflers.

16. Use according to any of claims 10-13 characterised in that at least two soundabsorbing elements according to any of claims 1-7 are assembled into one system, or are arranged in double or multiple layers with a predetermined spacing between the elements.

5

17. Soundabsorbing device characterised by the use of soundabsorbing elements according to any of the claims 1-7 or 8, wherein said element or elements are formed into a predetermined shape.

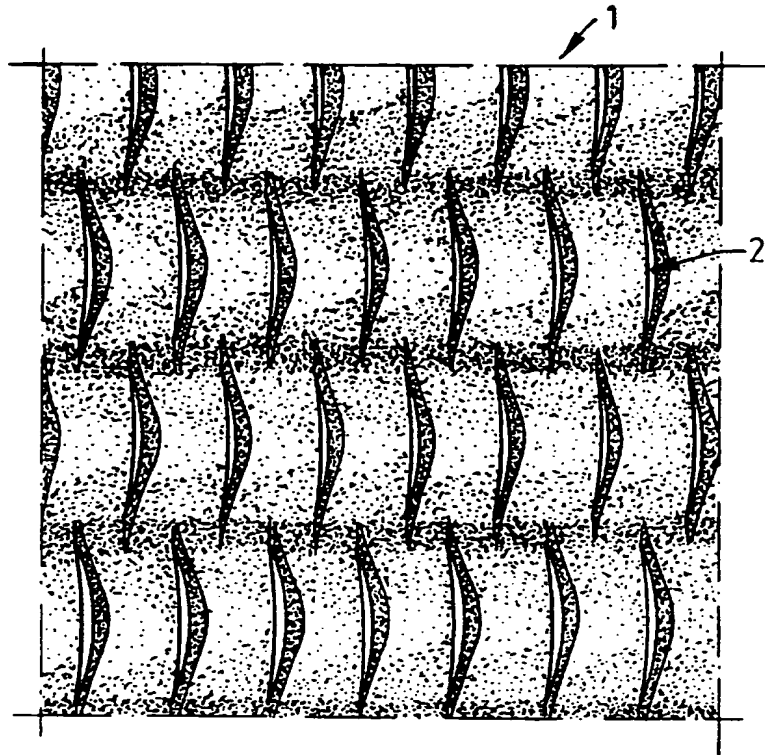


FIG. 1



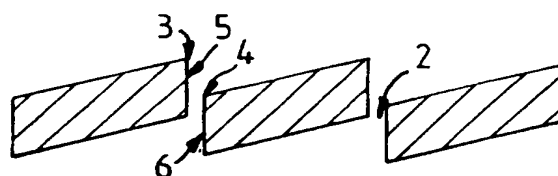


FIG. 3

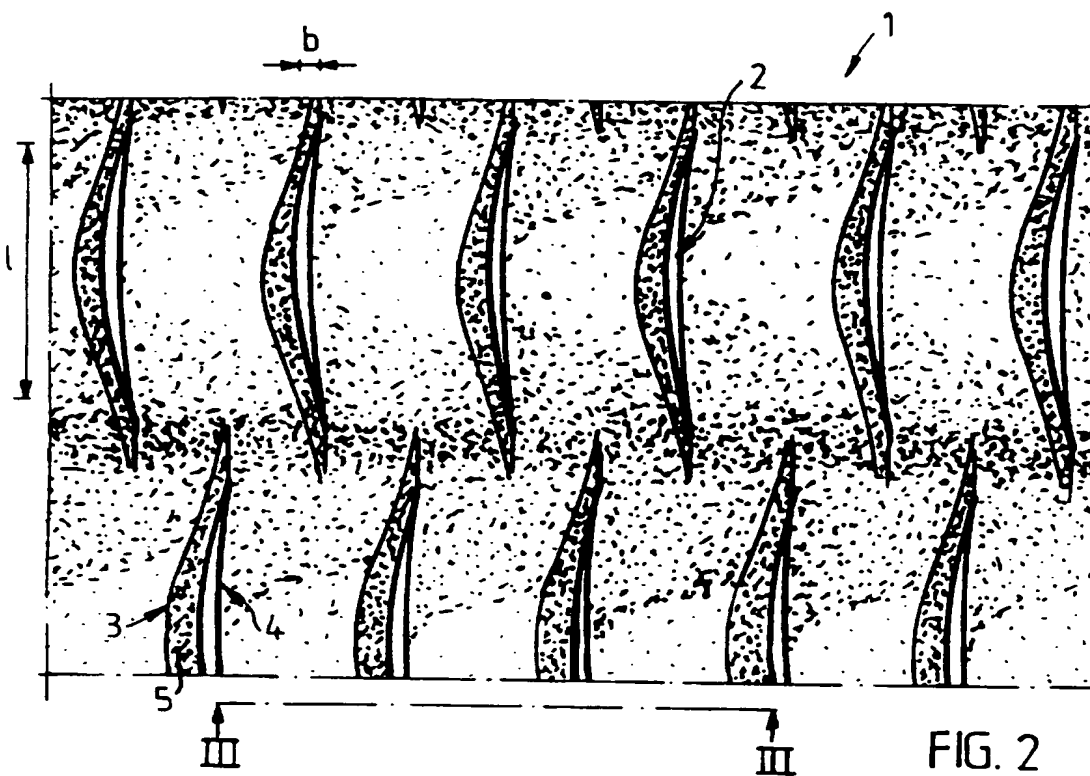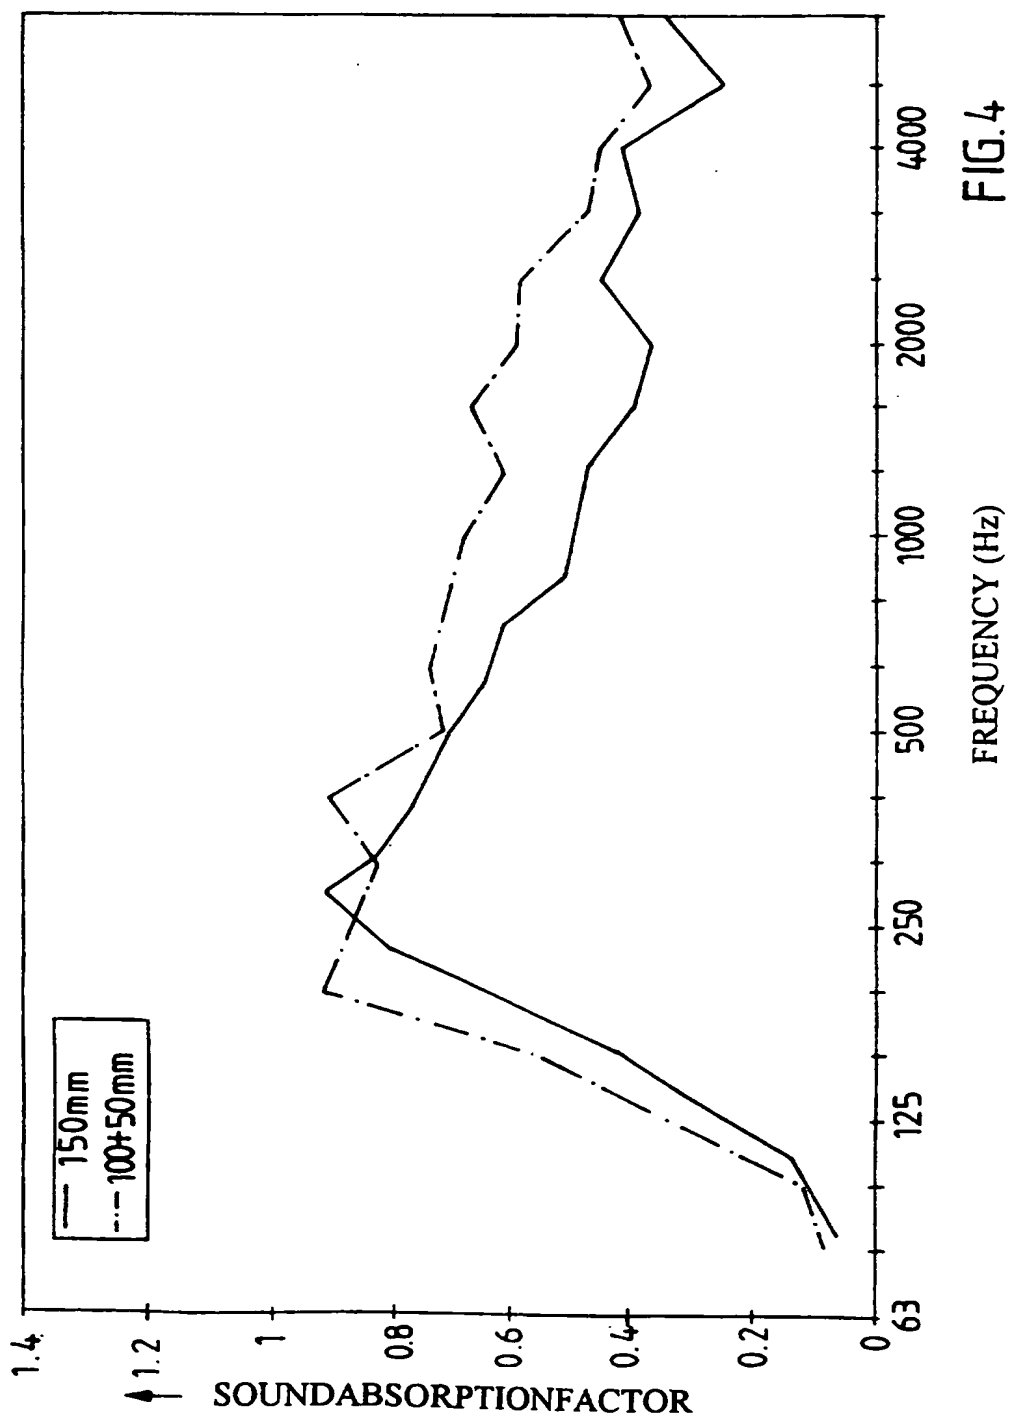

1
INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 97/00110

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: E04B 1/84

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: E04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	SE 207484 C (HUNTER DOUGLAS INTERNATIONAL (QUEBEC) LTD.), 20 Sept 1966 (20.09.66), figure 3, claim 1, detail 4 --	1,10,12
Y	US 1536666 A (J.P. FRANZ), 5 May 1925 (05.05.25), page 1, line 55 - line 56, figure 4, detail 6 --	1,10,12
A	FR 87329 E (M. KILEMNIK), 13 June 1966 (13.06.66), figures 5,6 --	1-15
A	FR 762525 A5 (JOHNS-MANVILLE CORPORATION), 12 April 1934 (12.04.34), figure 6 -- -----	1-15

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

17 April 1997

Date of mailing of the international search report

26 -04- 1997

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Vilho Juvonen
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

04/03/97

International application No.
PCT/SE 97/00110

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
SE	207484	C	20/09/66	NONE	
US	1536666	A	05/05/25	NONE	
FR	87329	E	13/06/66	NONE	
FR	762525	A5	12/04/34	BE 398436 A	00/00/00
				US 2043987 A	00/00/00
				US 2043988 A	00/00/00
				US 2132642 A	00/00/00